

TRANSFER CARTS



TC-24PN

Transfer carts are used with roller equipped type stands to eliminate overhead lifting operations by allowing the user to roll batteries from one unit to another. All SACKETT'S Transfer Carts pull the battery completely onto the cart. No extra handling is needed. Battery Compartment Rollers are available to modify most non-roller type trucks.

GENERAL SPECIFICATIONS FOR TRANSFER CARTS:

- Single Battery Compartment
- 3000 lb. Capacity
- 2-3/8" Diameter Roller with Acid Resistant
- Non-Conductive Coating and Sealed Bearings (3 year warranty)
- Vertical Roller Adjustment from 6" to 24"
- Flip-Up Battery Stop
- Non Conductive Back Stop
- 5" Composition Wheels
- Safe, One-Man Battery Transfer

Battery Transfer Carts with Push/Pull Extractor

All models include:

- Safety Chains with Hooks (SAFETY NOTE! Should be attached to vehicle)
- Extractor Lock to prevent battery roll-off, if flip up battery stop isn't up (see inset)

MODELS TC18-PN, TC24-PN, & TC30-PN Manual Transfer Cart

- Mechanically Driven (Hand Crank) Push/Pull Extractor
- Hand Operated Vertical Height Adjustment

MODELS TC18-PP, TC24-PP, & TC30-PP Powered Extraction, Manual Lift

- Hydraulically Powered Push/Pull Extractor
- Hand Operated Vertical Height Adjustment
- Two (2) 6-volt batteries

MODELS TC18-PL, TC24-PL, & TC30-PL Manual Extraction, Powered Lift

- Hydraulically Powered Vertical Height Adjustment
- Mechanically Drive (Hand Crank) Push/Pull Extractor
- Rack & Pinion Equalization on TC24-PL & 30-P-L



TC-PP



Storage Battery Systems LLC
N56 W16665 Ridgewood Drive
Menomonee Falls, WI 53051

BATTERY TRANSFER CARTS

Model PTC-V/M

Powered (Extraction and Lift) Transfer Cart

GENERAL SPECIFICATIONS

- 3,000 lb. Capacity
- Heavy Duty Construction
- 2-3/8" Diameter Non-Conductive Rollers (3 year warranty)
- Hydraulically Power Push/Pull Plate
- Hydraulically Powered Lift
- Vacuum Cup Extraction
- Operator Platform in rear or on side


Options:

- Magnet Extraction
- 6" Hydraulic Vacuum Cup Extension Available (see inset)

- **REDUCE CHARGING AREA SIZE**
- **REDUCE OPERATOR FATIGUE**
- **QUICK/SAFE BATTERY CHANGEOUT**
- **REDUCE BATTERY CONTACT**



PTC-V

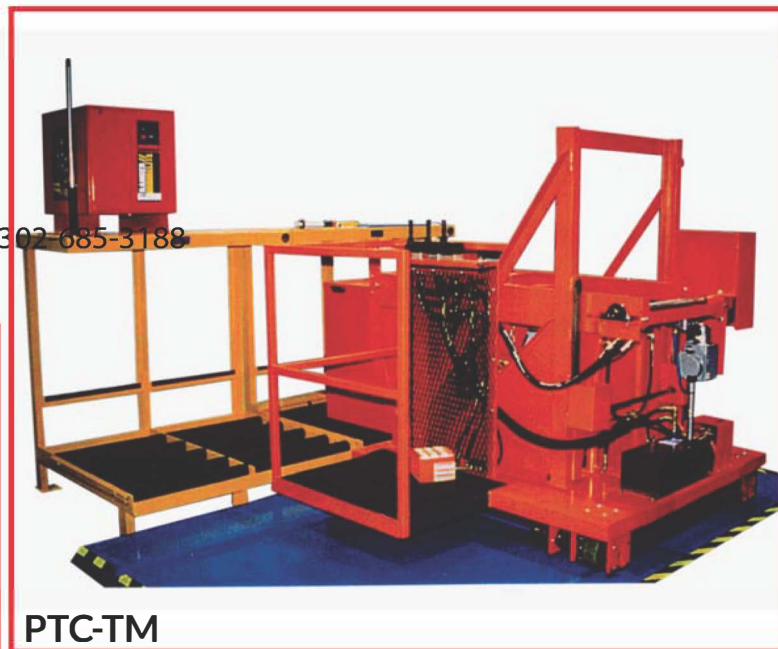

PTC-TM

Powered Transfer Cart Track Mounted

GENERAL SPECIFICATIONS

- Track Mounted, Double Flanged Wheels
- Hydraulically Powered Travel
- 480v AC

DC Operation See XTC Carts



Storage Battery Systems LLC
N56 W16665 Ridgewood Drive
Menomonee Falls, WI 53051

www.sbsbattery.com

800-554-2243

sbs@sbsbattery.com