


Model-S Watering Gun

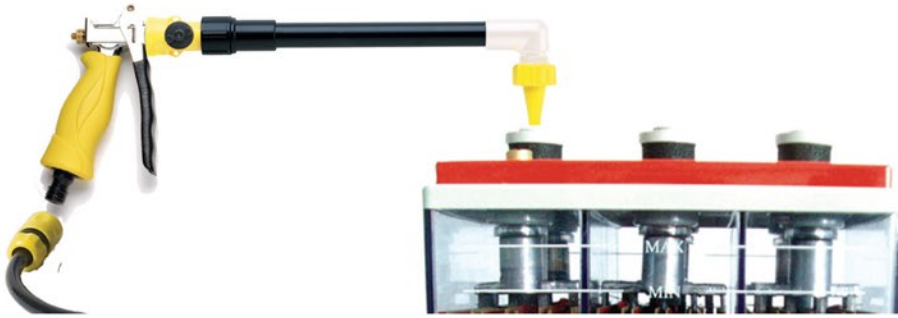


Installation:

- Attach the quick-connect to your supply hose.
- If the static water pressure is greater than 75 PSI (5.2 bar), a pressure reducer must be installed. Part number PS-PR.
- Click the Watering Gun on to the fitting.
- Turn on the water.

Operation:

- Place the Nozzle in the flame arrestor vent, so that the end of the nozzle lines up with the hole.
- Squeeze the trigger to allow the gun to dispense water.
- If the flow is too fast, reduce the flow with the adjustable flow throttle.
- Stop filling when the level is visible correct.

Note: The product is not intended for use with acid.

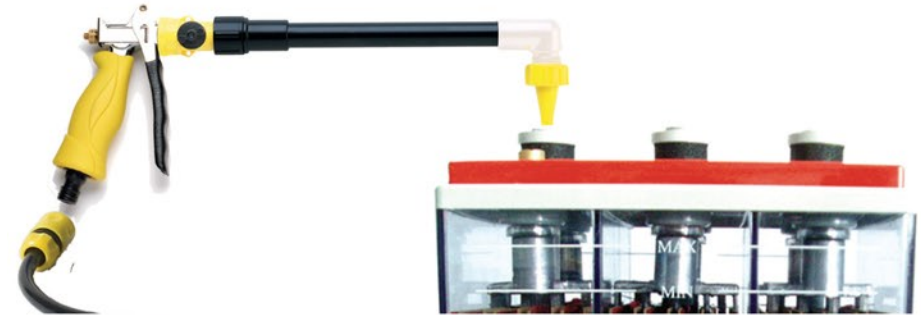

Installation:

- Attach the quick-connect to your supply hose.
- If the static water pressure is greater than 75 PSI (5.2 bar), a pressure reducer must be installed. Part number PS-PR.
- Click the Watering Gun on to the fitting.
- Turn on the water.

Operation:

- Place the Nozzle in the flame arrestor vent, so that the end of the nozzle lines up with the hole.
- Squeeze the trigger to allow the gun to dispense water.
- If the flow is too fast, reduce the flow with the adjustable flow throttle.
- Stop filling when the level is visible correct.

Note: The product is not intended for use with acid.



Storage Battery Systems LLC
N56 W16665 Ridgewood Drive
Menomonee Falls, WI 53051